


Xcalibur

Combining POS application with HD level media performance, Xcalibur leads the POS terminal development into a new era. With the ATI HD3200 graphic IC integrated and optional side-port memory support, Xcalibur can also serve as a digital signage player. Besides the excellent media enhanced features, Xcalibur is equally strong in POS application features, such as dual-core CPU support, 2 x HDD capability with RAID function, abundant I/O access, easy-maintenance mechanical structure, and efficient power management.



- Multiple display with independent audio stream support
- Strong graphic performance, supporting mpeg2/4, H.264...etc
- 2 x HDD trays available with RAID function support
- Integrated OSD and monitor power indicator for better display monitoring
- Easy maintenance for HDD, RAM, and the M/B box
- Easy access for jumper setting adjustment

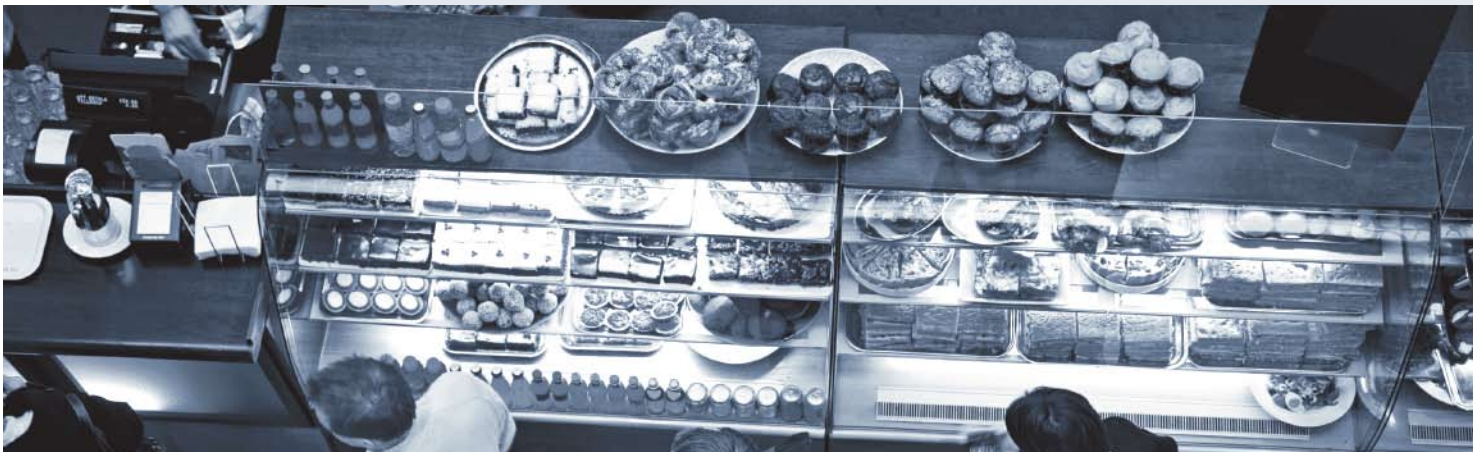


I/O Connector Panel

Side I/O



- A. USB
- B. Power Button

Rear I/O

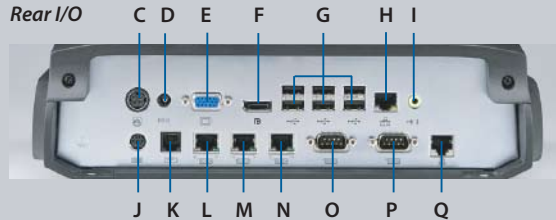

- C. DC 12V Out
- D. DC In
- E. VGA
- F. Display Port
- G. USB
- H. LAN
- I. Line Out
- J. K/B
- K. Cash Drawer
- L. COM2
- M. COM3
- N. COM4
- O. COM5
- P. COM6
- Q. Data Port

Specifications

Model	AL-9705
Processor	AMD Athlon 3100+ 2.0GHz (Single Core) / 3600+ 1.9GHz (Dual Core)
System Memory	1GB standard, maximum 4GB (2 x 240-pin DDR2 SDRAM)
Speaker	Built-in Speaker 2W x 2
Power Supply	150W (12V/12.5A) External Power Adaptor
Storage Device	2 x 2.5" SATA HDD bays available with RAID function support (one tray as default, the 2nd as optional)
Construction	Aluminum Die-casting + SECC
Housing Color	Silver+White / Black+Silver
Touch LCD Display	
Size / Resolution	15" TFT LCD / 1024 x 768
Brightness	250 / 350 cd/m ²
Touch Screen	5 / 4 wire Resistive
I/O Ports	
Serial Port	<ul style="list-style-type: none"> • 5 x External: COM2 & COM3 & COM4 (RJ45) with 5V/12V/RI selectable, COM5 & COM6 (DB9) with RI only • 1 x Internal: COM1
USB Port	8 x External USB port (6 in rear, 2 in side), 2 x Internal
Data Port	1 x RJ45 (10P10C) for LPT-type KeyPro application only
Cash Drawer Port	1 x RJ11 (12V/24V selectable)
PS/2	1 x Keyboard
LAN Port	1 x RJ45 Giga LAN
Video Port	1 x VGA (DB15), 1 x Display port
Audio Port	1 x Line-out
DC Output	1 x 12V for 2nd display
OS Supported	
Windows	XP Pro, XP Embedded, WEPOS, POSReady 2009, Win 7
Linux	Fedora, SuSE
Physical Dimensions	
Dimensions (W x H x D)	382 x 371 x 316 mm
Environment	
EMI / Safety	CE, FCC Class A
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Storage Temperature	-10°C ~ 50°C (14°F ~ 122°F)
Relative Humidity	10% ~ 90% (non-condensing)
Optional Peripherals	
MCR 3-in-one	Integrated MCR/Smartcard/Fingerprint or RFID
i-Button	Integrated on the system base (pre-installed by factory)
2nd Display	Integrated 12" LCD
Customer Display	Integrated VFD Customer Pole Display
Wireless LAN	Integrated 802.11b/g wireless LAN module (pre-installed by factory)

All product specifications are subject to change without notice.

